



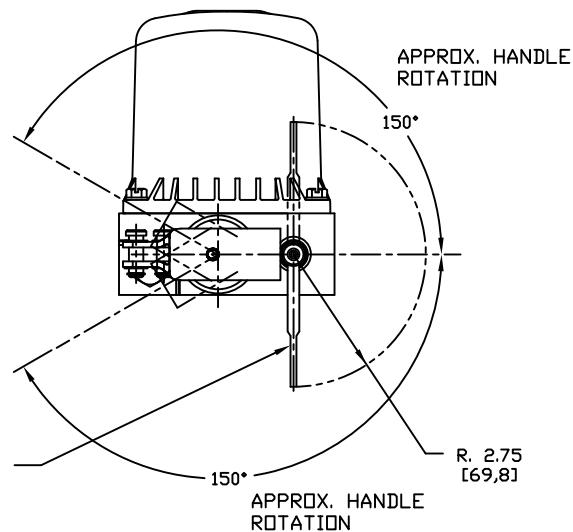


RAISE / LOWER SHIFT LEVER TO BE
IN "LOWER" POSITION, AS SHOWN
DURING VEHICLE OPERATION.

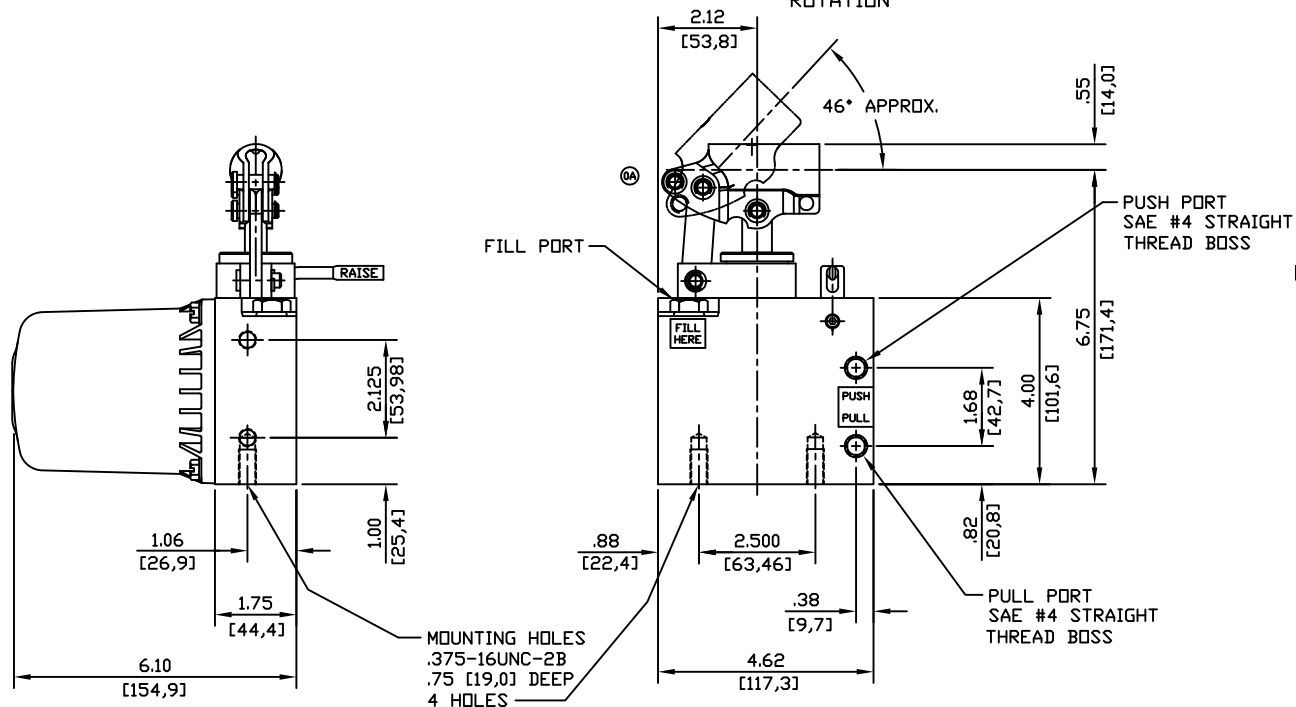

SPECIFICATIONS:

RELIEF VALVE SETTING	3200-3500 PSI [220,6-241,3 BAR]
MAX. OPERATING PRESSURE	3600 PSI [248,3 BAR]
RECOMMENDED OPERATING TEMP.	-30°F TO 130° [-34°C TO 54°C]
PUMP PLUNGER DIA.	.75 [19,0]
PUMP PLUNGER EFFECTIVE AREA	.442 SQ IN [2,85 SQ CM]
STROKE	1.00 [25,4]
VOLUME PER STROKE	.442 CU IN [7,24 CU CM]
RESERVOIR CAPACITY	35 CU IN [574 CU CM] USEABLE
RESERVOIR VENT RELIEF SETTING	50-75 PSI [3,4-5,2 BAR]
MAX. PORT FITTING TORQUE	10-12 FT LBS
PUMP RETURN ORIFICE DIA.	.018 [0,46]
MAX. MOUNTING BOLT TORQUE	16-19 FT LBS
MIN. MOUNTING BOLT ENGAGEMENT	.50 [12,7]
RECOMMENDED FLUID	PER MIL-H-5606 OR EQUIV. DO NOT USE ATF
WEIGHT	5.3 LBS [2,4 kg]
CORROSION RESISTANCE	250 HRS PER ASTM B117
PAINT SPECIFICATIONS	SEMI-GLOSS BLACK

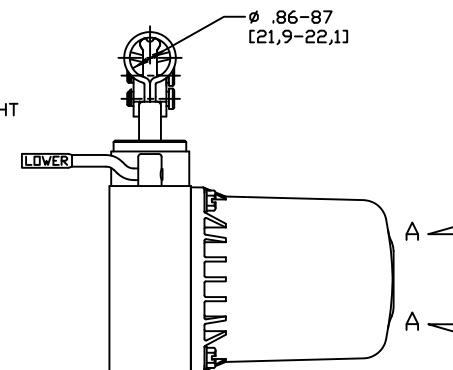

VIEW A-A
SCALE 2:1

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS
ARE NOMINAL AND MAY VARY DUE TO MANUFACTURING
TOLERANCES AND ASSEMBLY TOLERANCE STACK-UP.

FILE NO. 001910

REVISED BEAM PINS & CLIPS 10-04-7 LV 4/10/12 30468 RELEASED	DATE CHANGES	DIMENSIONS IN BRACKETS ARE IN [mm]		POWER-PACKER. A UNIT OF APPLIED POWER INC.		13000 WEST SILVER SPRING DR. BUTLER, WISCONSIN 53007	
		Specification Sheet				DESCRIPTION TILT CAB PUMP	
		MODEL NO. HP50044204		DR. THIS CH.		DRAWING NO. PID201	