


OPERATING PRESSURE (LIFT OFF TO FULL EXTENSION)
200-350 PSI [13,8-24,1 BAR]
OPERATING PRESSURE MAX.— 5000 PSI [345 BAR]
PISTON DIA.— 1.375 [34,92]
HOOK SPRING PRELOAD AT RECOMMENDED LATCH PIN
LOCATION — 300 LBS. MIN. [136,1 KG]
PAINT — BLACK
WORKING FLUID PER MIL-H-5606C

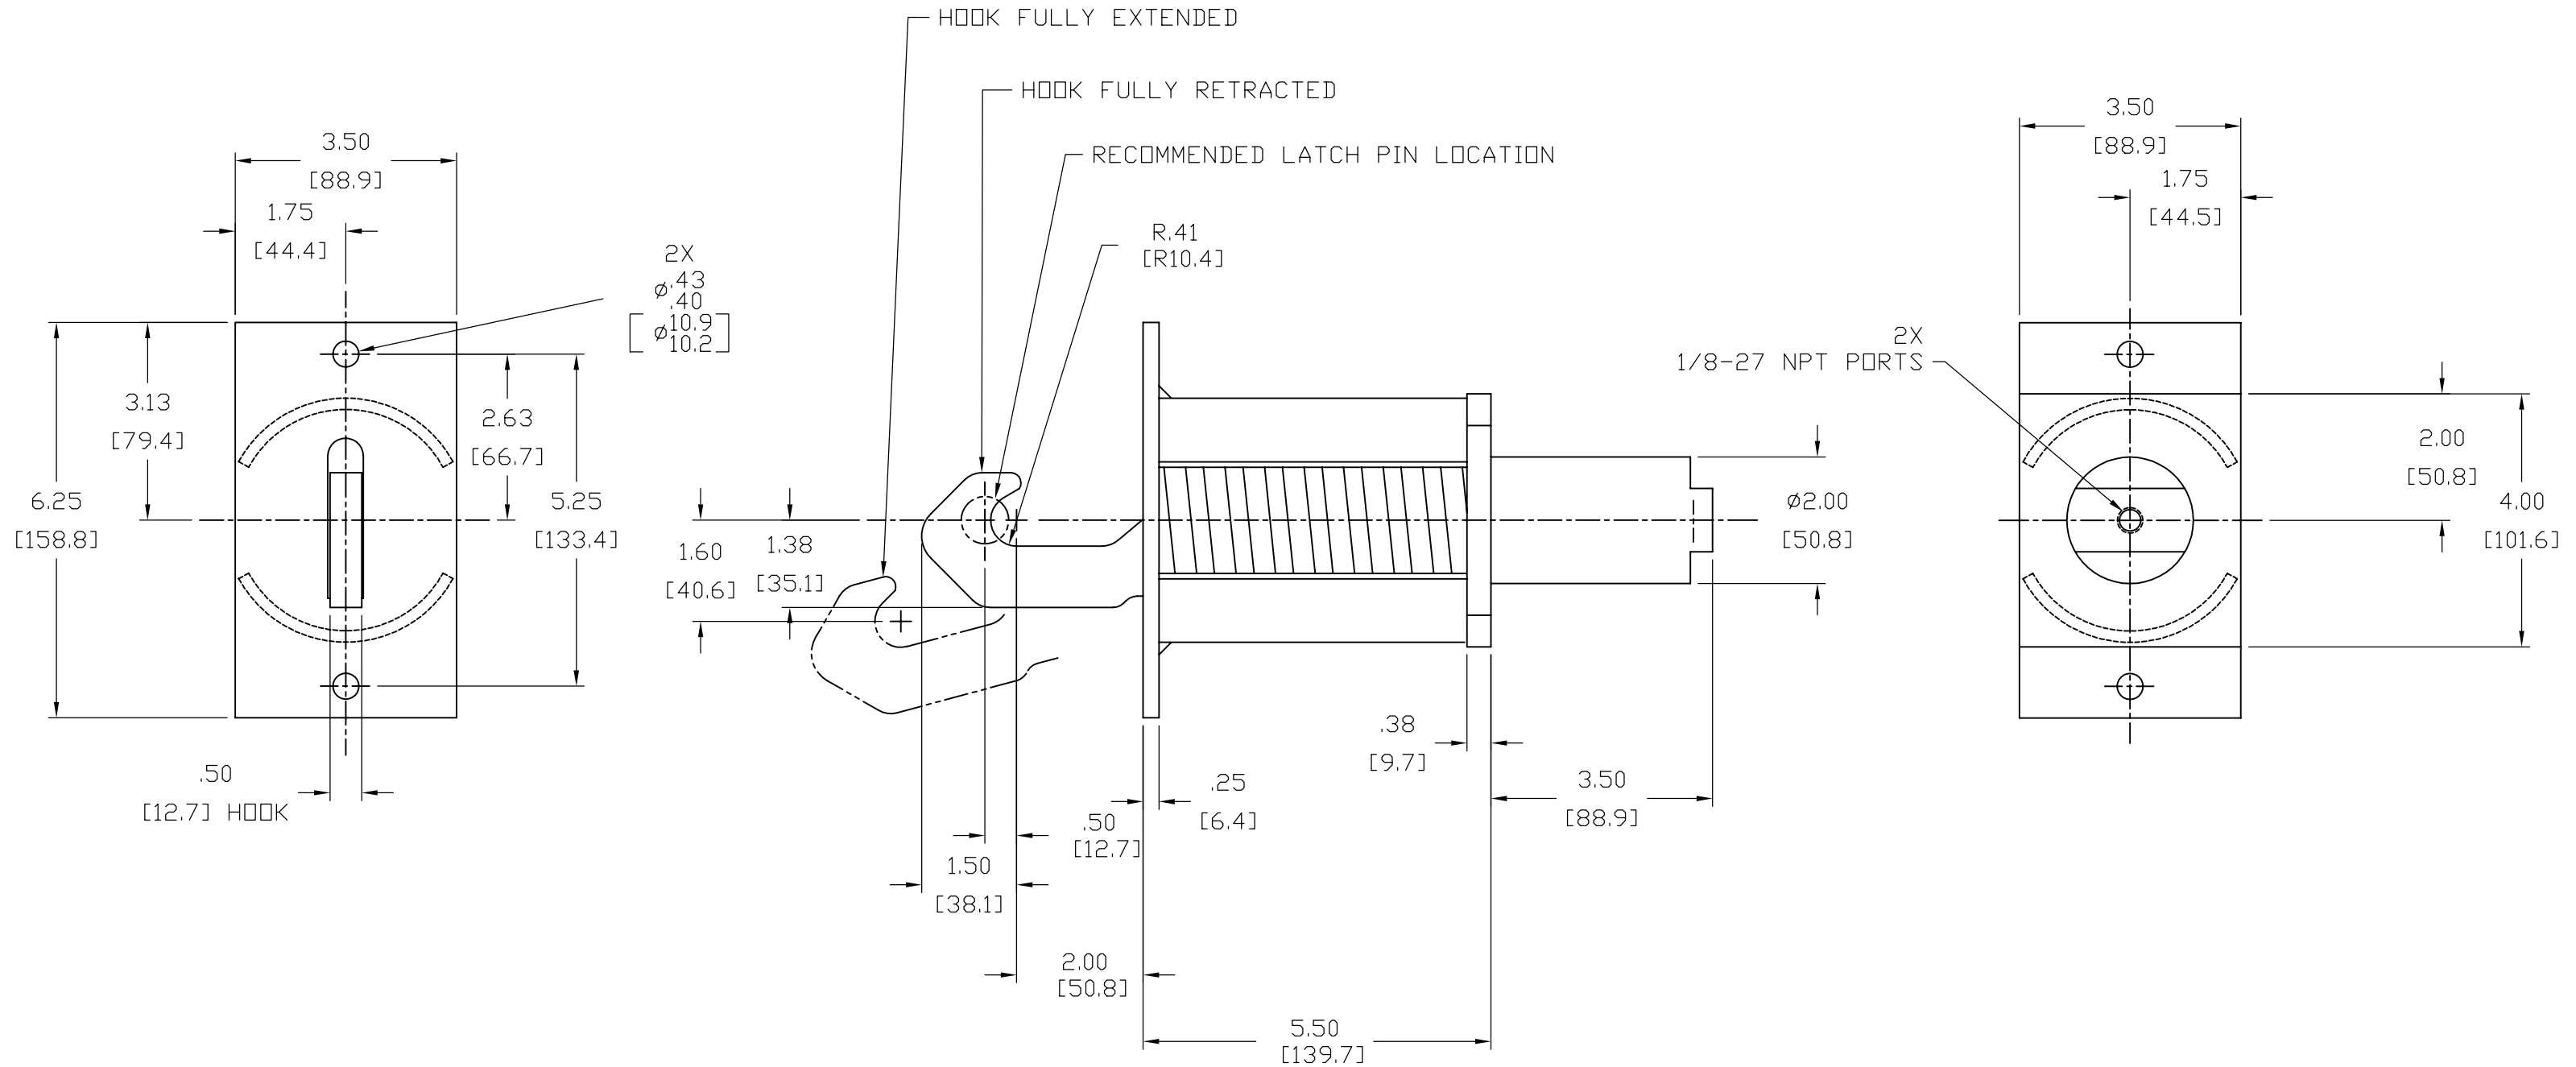

DO NOT SCALE	DESCRIPTION LATCH ASSEMBLY			DRAWN: DK DATE: 06/13/05		Actuant - POWER PACKER					
	MATERIAL SEE BOM			CHECKED: DATE:							
	SIZE B	PROJECTION 	THIS DOCUMENT AND THE INFORMATION CONTAINED HEREIN IS THE SOLE PROPERTY OF ACTUANT AND ITS SUBSIDIADIES. IT CONTAINS PROPERTY INFORMATION, WHICH IS CONFIDENTIAL. ANY USE OR REPRODUCTION OF THIS DRAWING WITHOUT AUTHORIZATION FROM ACTUANT OR ITS SUBSIDIUARIE MAY WARRENT LEGAL ACTION AGAINST THE USER.	TOLERANCES DECIMALS ANGLES .X ± .1 ± 1' .XX ± .03 .XXX ± .015 BREAK ALL SHARP EDGES .005/.030 UNLESS OTHERWISE SPECIFIED		UNITS: INCHES [mm]		LAST REVISED: 06/13/05		ECN: 31901	
	SCALE: 1:1			REF:		PART NUMBER		REV.			
	SHEET 1 OF 1					LH30037233		2			