
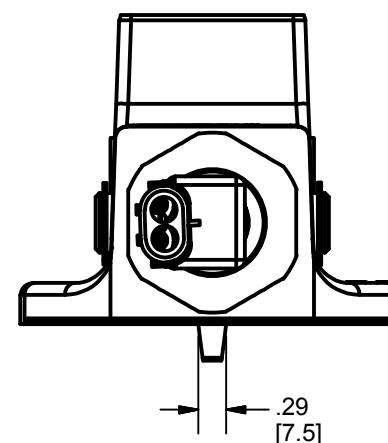


SCALE 1 / 2

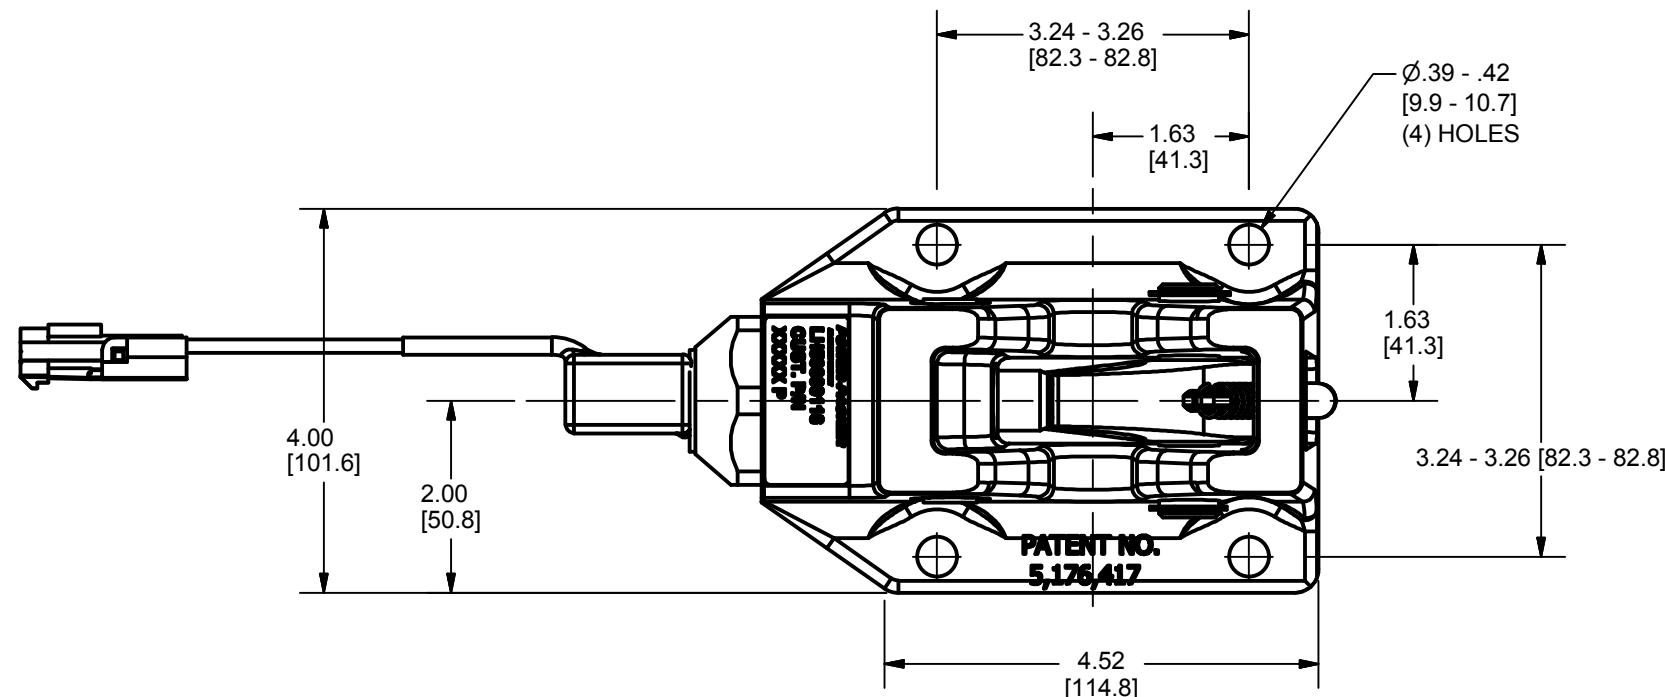


CONNECTOR: INCLUDES  
TERMINALS & SEAL.  
PACKARD #12010973

## **SPECIFICATIONS:**

MAX. VERTICAL PULL LOAD .....	10,000 LBS [4536 KG]
MAX. HYDRAULIC PRESSURE .....	5,000 PSI [345 BAR]
RECOMMENDED FLUID .....	PER MIL-H-5606 OR EQUIV.
OPERATING TEMPERATURE .....	-30°F - 130°F [-34°C - 54°C]
CORROSION RESISTANCE .....	200 HRS. PER ANSI B1117
WEIGHT .....	3.4 LBS [1,5 KG]

## **OPERATION:**

- HYDRAULIC PRESSURE RELEASES LATCH LOCK.
- CAB WEIGHT ON CATCH BRACKET (NOT SHOWN) ENGAGES LATCH.
- RELEASE OF HYDRAULIC PRESSURE LOCKS LATCH.
- SWITCH IS NORMALLY OPEN AND CONTACTS CLOSE WHEN LATCH IS UNLOCKED.

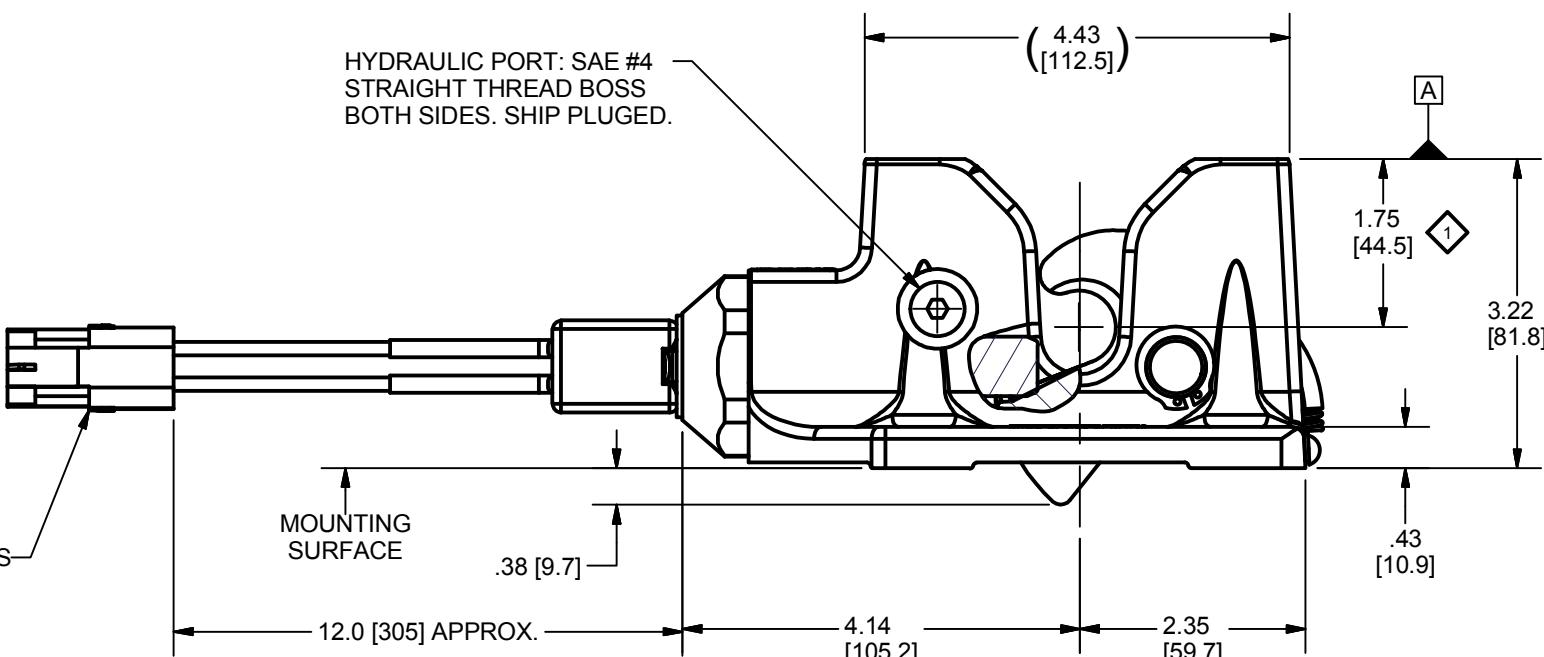

## DESIGN NOTE:

1 CATCH BRACKET MUST BE DESIGNED TO CLAMP ON SURFACE DATUM A PER 1.75 OFFSET DIMENSION FOR Ø.750 CATCH PIN.

<b>DO NOT SCALE</b>	DESCRIPTION	LATCH ASM HYD W/ SWITCH & CONNECTOR		
	MATERIAL			
	SIZE	PROJECTION	LEGEND	TOLERANCES
<b>B</b>	 	 	REVISION CRITICAL TOTAL NO. OF  USED	UNLESS OTHERWISE SPECIFIED .X ± .1 .XX ± .03 .XXX ± .015 ANGLE ±1° BREAK ALL SHARP EDGES 005/030

THIS DOCUMENT AND THE INFORMATION  
CONTAINED HEREIN IS THE SOLE PROPERTY OF  
ACTUANT AND ITS SUBSIDIARIES. IT CONTAINS  
PROPRIETARY INFORMATION, WHICH IS  
CONFIDENTIAL. ANY USE OR REPRODUCTION  
OF THIS DRAWING WITHOUT AUTHORIZATION  
FROM ACTUANT OR ITS SUBSIDIARY MAY  
WARRANT LEGAL ACTION AGAINST THE USER.

# **POWER - PACKER**

## **Actuator**

AN **Actuarial** COMPANY

NUMBER  
**LH50000116**

REV.  
0G

UNITS: INCHES [mm] SHEET 1 OF 1