




SPECIFICATIONS:

RELIEF VALVE SETTING	4000-4300 PSI [275,8-296,5 BAR]
MAX. OPERATING PRESSURE	4400 PSI [303,4 BAR]
RECOMMENDED OPERATING TEMP.	-30°F TO 130° [-34°C TO 54°C]
PUMP PLUNGER DIA.	.69 [17,5]
PUMP PLUNGER EFFECTIVE AREA	.371 SQ IN [2,39 SQ CM]
STROKE	1.00 [25,4]
VOLUME PER STROKE	.371 CU IN [6,08 CU CM]
RESERVOIR CAPACITY	65 CU IN [1065,2 CU CM] USEABLE
RESERVOIR VENT RELIEF SETTING	50-75 PSI [3,4-5,2 BAR]
MAX. PORT FITTING TORQUE	10-12 FT LBS
PUMP RETURN ORIFICE DIA.	.018 [0,46]
MAX. MOUNTING BOLT TORQUE	16-19 FT LBS
MIN. MOUNTING BOLT ENGAGEMENT	.50 [12,7]
RECOMMENDED FLUID	PER MIL-H-5606 OR EQUIV. DO NOT USE ATF
WEIGHT	5.4 LBS. [2,5 kg]
CORROSION RESISTANCE	250 HRS PER ASTM B117
PAINT SPECIFICATIONS	SEMI-GLOSS BLACK PRIMER



VIEW A-A
SCALE 2:1

RAISE / LOWER SHIFT LEVER TO BE
IN 'LOWER' POSITION, AS SHOWN
DURING VEHICLE OPERATION.

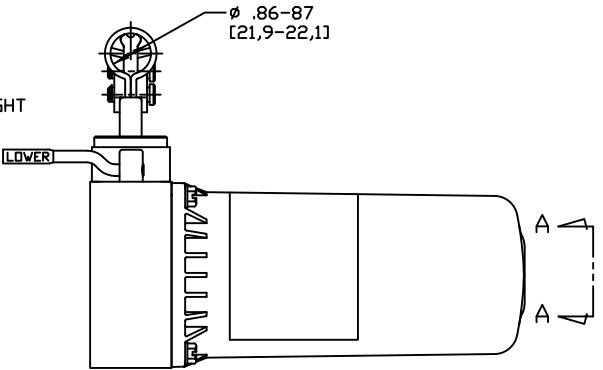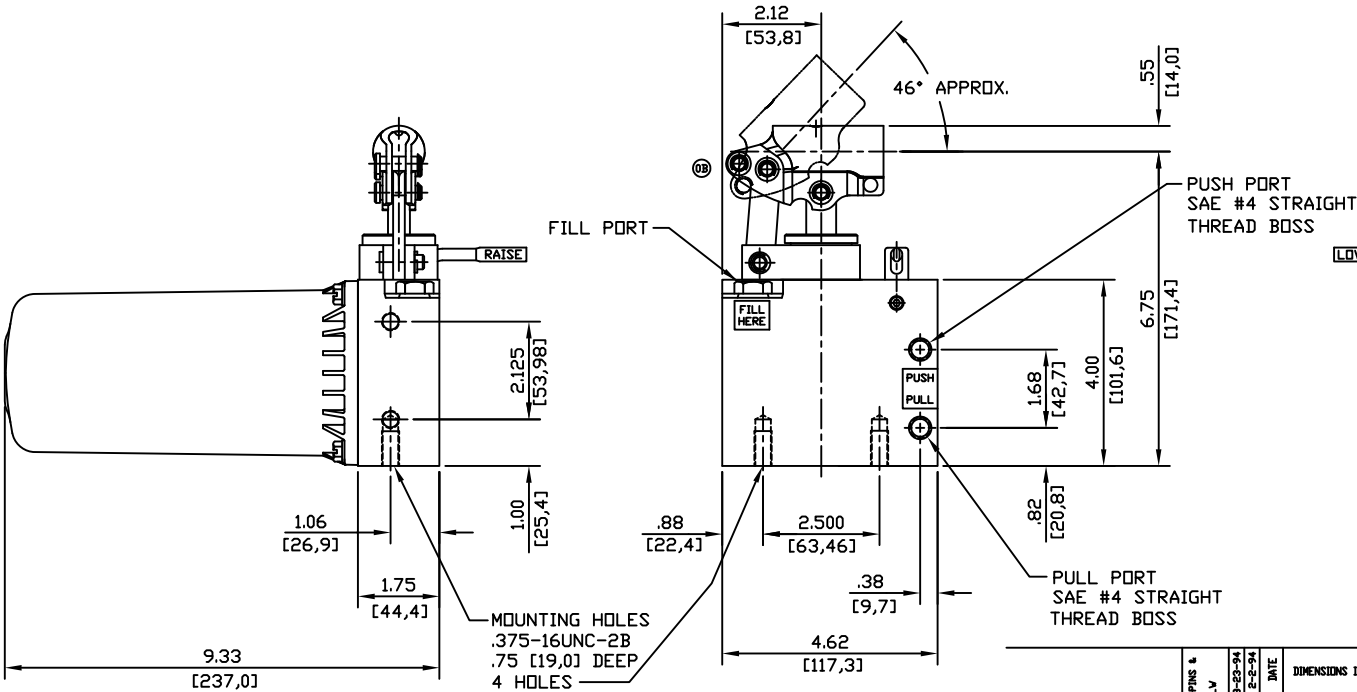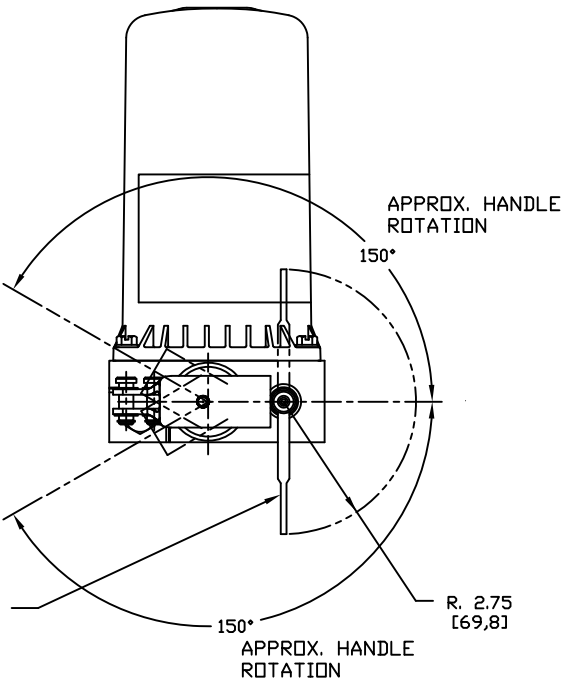

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS
ARE NOMINAL AND MAY VARY DUE TO MANUFACTURING
TOLERANCES AND ASSEMBLY TOLERANCE STACK-UP.

REVISED DRAWING PINS & CHANGES	DATE	DIMENSIONS IN BRACKETS ARE IN [mm]	POWER-PACKER A UNIT OF APPLIED POWER INC.	DESCRIPTION
30453 A DMS 3-23-94 30455 RELEASED E-2-94 4/11/12	05/05/93	Specification Sheet	13000 WEST SILVER SPRING DR. BUTLER, WISCONSIN 53007	TILT CAB PUMP
ECO	DATE	MODEL NO.	DRAWING NO.	FILE NO.
	02/02/94	HP50037200	PID 119	000380